Contact Arrangement

Front face of pin insert or rear face of socket insert illustrated.

CONTACT LEGEND 16 12 8 4 0

1 CONTACT

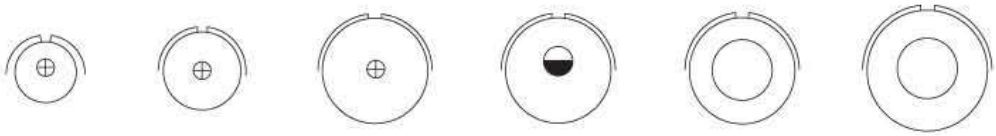

Insert Arrangement	12S-4	14S-4	16S-3	16-2	16-12	18-6
Contact Size - No. of Contacts	#16-1	#16-1	#16-1	#12-1	#4-1	#4-1
Service Rating	D	D	B	E	A	D

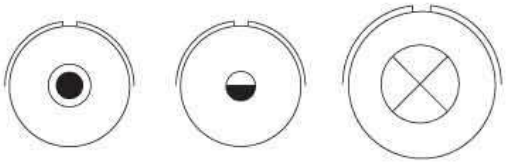

Insert Arrangement	18-7	18-16	22-7
Contact Size - No. of Contacts	#8-1	#12-1	#0-1
Service Rating	B	C	E

2 CONTACTS

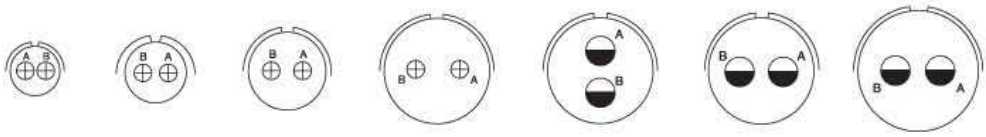

Insert Arrangement	10SL-4	12S-3	14S-9	16S-4	16-11	16-13	18-3
Contact Size - No. of Contacts	#16-2	#16-2	#16-2	#16-2	#12-2	#12-2	#12-2
Service Rating	A	A	A	D	A	A	D

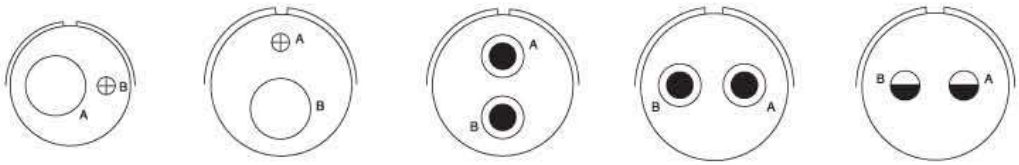

Insert Arrangement	18-14	20-12	20-23	22-1	22-8
Contact Size - No. of Contacts	#16-1, #4-1	#16-1, #4-1	#8-2	#8-2	#12-2
Service Rating	A	A	A	D	E

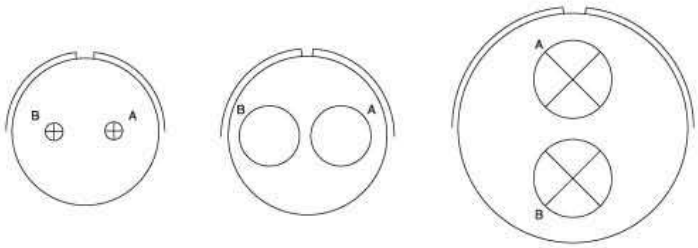

Insert Arrangement	22-11	24-9	32-5
Contact Size - No. of Contacts	#16-2	#4-2	#0-2
Service Rating	B	A	D

Contact Arrangement

Front face of pin insert or rear face of socket insert illustrated.

CONTACT LEGEND 16 12 8 4 0

3 CONTACTS

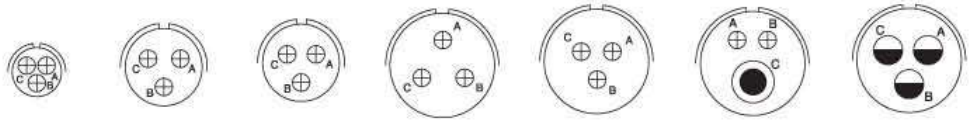

Insert Arrangement	10SL-3	14S-1	14S-7	16S-5	16S-6	16-7	16-10
Contact Size - No. of Contacts	#16-3	#16-3	#16-3	#16-3	#16-3	#16-2, #8-1	#12-3
Service Rating	A	A	A	A	A	A	A

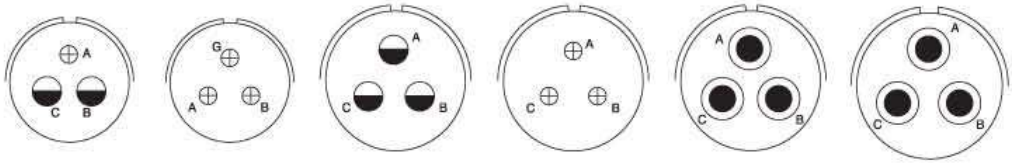

Insert Arrangement	18-5	18-22	20-3	20-6	20-19	22-2
Contact Size - No. of Contacts	#16-1, #12-2	#16-3	#12-3	#16-3	#8-3	#8-3
Service Rating	D	D	D	D	A	D

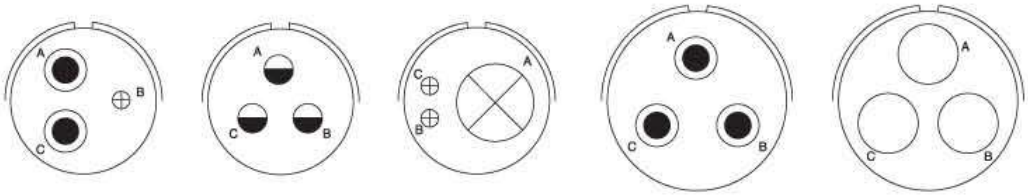

Insert Arrangement	22-6	22-9	22-21	28-3	28-6
Contact Size - No. of Contacts	#16-1, #8-2	#12-3	#16-2, #0-1	#8-3	#4-3
Service Rating	D	E	A	E	D



Insert Arrangement	36-4
Contact Size - No. of Contacts	#0-3
Service Rating	D(A) / A(B,C)

4 CONTACTS

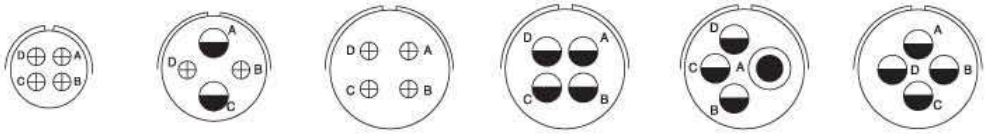

Insert Arrangement	14S-2	16-9	18-4	18-10	18-13	18-15
Contact Size - No. of Contacts	#16-4	#16-2, #12-2	#16-4	#12-4	#12-3, #8-1	#12-4
Service Rating	Inst.	A	D	A	A	A

Contact Arrangement

Front face of pin insert or rear face of socket insert illustrated.

CONTACT LEGEND	16	12	8	4	0

4 CONTACTS

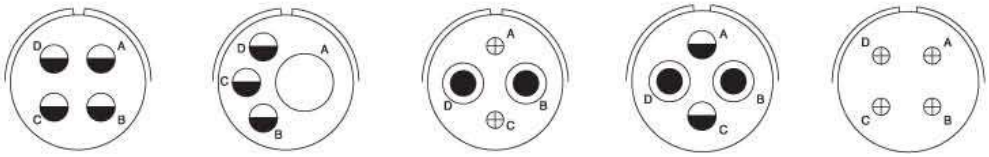

Insert Arrangement	20-4	20-20	20-24	22-4	22-10
Contact Size - No. of Contacts	#12-4	#12-3, #4-1	#16-2, #8-2	#12-2, #8-2	#16-4
Service Rating	D	A	A	A	E

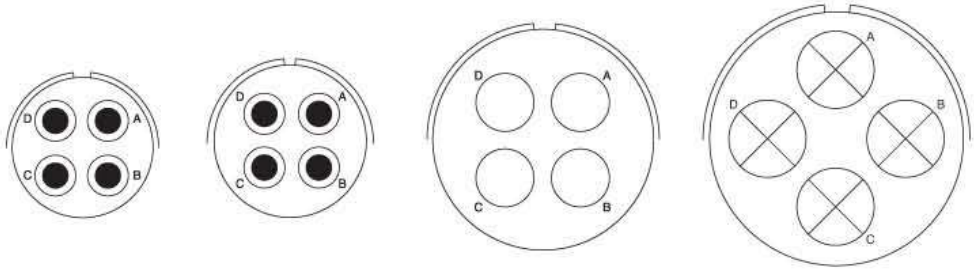

Insert Arrangement	22-22	24-22	32-17	36-5
Contact Size - No. of Contacts	#8-4	#8-4	#4-4	#0-4
Service Rating	A	D	D	A

5 CONTACTS

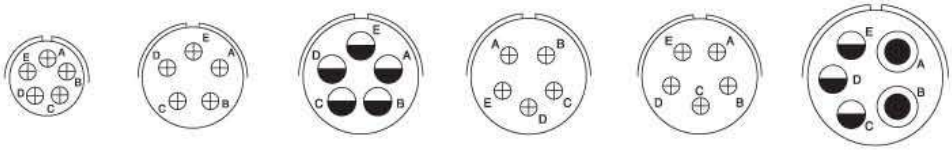

Insert Arrangement	14S-5	16S-8	18-11	18-20	18-29	20-14
Contact Size - No. of Contacts	#16-5	#16-5	#12-5	#16-5	#16-5	#12-3, #8-2
Service Rating	Inst.	A	A	A	A	A

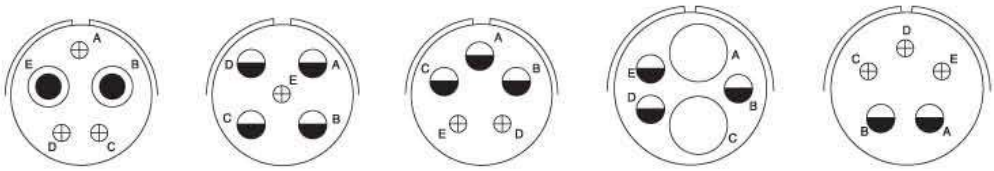

Insert Arrangement	22-12	22-13	22-34	24-12	24-17
Contact Size - No. of Contacts	#16-3, #8-2	#16-1. #12-4	#16-2, #12-3	#12-3, #4-2	#16-3, #12-2
Service Rating	D	D(E) / A(All others)	D	A	D

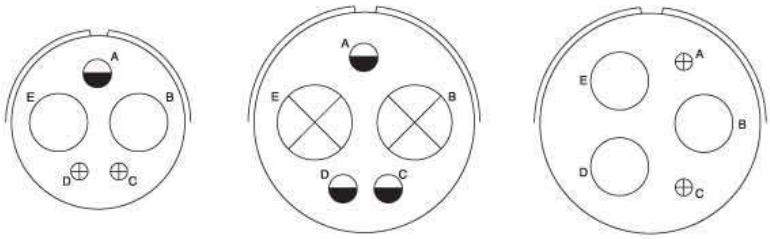

Insert Arrangement	28-5	32-1	32-2
Contact Size - No. of Contacts	#16-2, #12-1, #4-2	#12-3, #0-2	#16-2, #4-3
Service Rating	D	E(A) / D(All others)	E

Contact Arrangement

Front face of pin insert or rear face of socket insert illustrated.

CONTACT LEGEND	⊕	◒	●	○	⊗
	16	12	8	4	0

6 CONTACTS

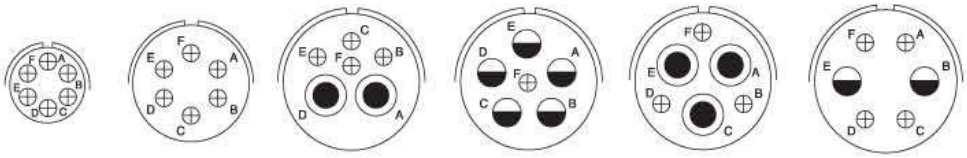

Insert Arrangement	14S-6	18-12	20-8	20-17	20-22	22-5
Contact Size - No. of Contacts	#16-6	#16-6	#16-4, #8-2	#16-1, #12-5	#16-3, #8-3	#16-4, #12-2
Service Rating	Inst.	A	Inst.	A	A	D

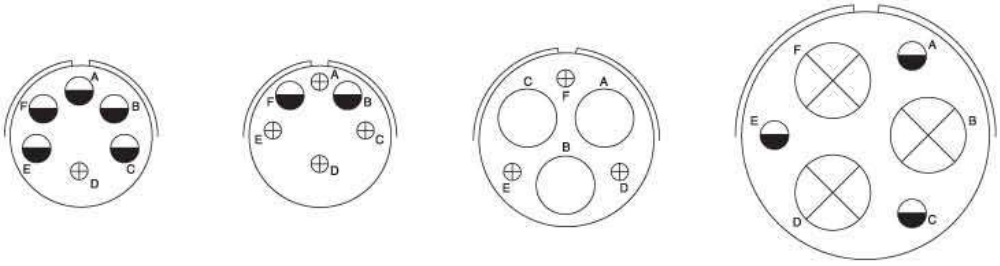

Insert Arrangement	22-15	22-24	28-22	36-3
Contact Size - No. of Contacts	#16-1, #12-5	#16-4, #12-2	#16-3, #4-3	#12-3, #0-3
Service Rating	E(D) / A(All others)	D(C, D, E) / A(All others)	D	D



Insert Arrangement	36-6
Contact Size - No. of Contacts	#4-4, #0-2
Service Rating	A

7 CONTACTS

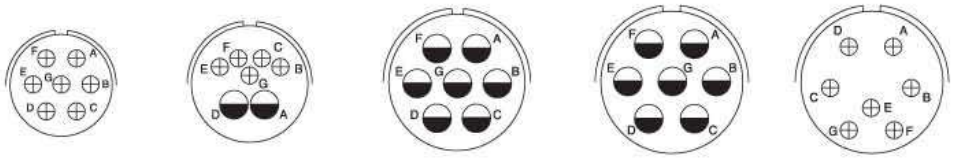

Insert Arrangement	16S-1	18-9	20-15	22-28	22-33
Contact Size - No. of Contacts	#16-7	#16-5, #12-2	#12-7	#12-7	#16-7
Service Rating	A	Inst	A	A	A(E, F, G) / D(All others)

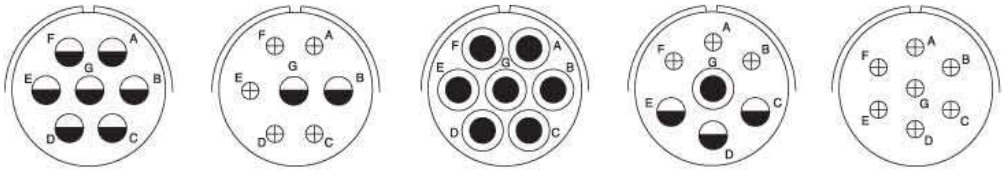

Insert Arrangement	24-2	24-3	24-10	24-16	24-27
Contact Size - No. of Contacts	#12-7	#16-5, #12-2	#8-7	#16-3, #12-3, #8-1	#16-7
Service Rating	D	D	A	D(A, B, F, G) / A(All others)	E

Contact Arrangement

Front face of pin insert or rear face of socket insert illustrated.

CONTACT LEGEND	16	12	8	4	0

7 CONTACTS





Insert Arrangement	28-10	32-10
Contact Size - No. of Contacts	#12-3, #8-2, #4-2	#16-3, #8-2, #4-2
Service Rating	D(G) / A(Bal.)	E(A, F) / B(G) / D(B, E) / A(C, D)

8 CONTACTS











Insert Arrangement	18-8	20-7	20-9	22-18	22-23
Contact Size - No. of Contacts	#16-7, #12-1	#16-8	#16-7, #12-1	#16-8	#12-8
Service Rating	A	D(A, B, H, G) /A(All others)	D(H) / A(All others)	A(C, D, E) / D(All others)	D(H) / A(All others)







Insert Arrangement	22-36	24-6	32-15
Contact Size - No. of Contacts	#12-8	#12-8	#16-6, #0-2
Service Rating	D(H) / A(All others)	D(A, G, H) / A(All others)	D

9 CONTACTS











Insert Arrangement	20-16	20-18	20-21	22-16	22-17
Contact Size - No. of Contacts	#16-7, #12-2	#16-6, #12-3	#16-8, #12-1	#16-6, #12-3	#16-8, #12-1
Service Rating	A	A	A	A	D(A) / A(All others)











Insert Arrangement	22-20	22-27	24-11	28-1	28-4
Contact Size - No. of Contacts	#16-9	#16-8, #8-1	#12-6, #8-3	#12-6, #8-3	#16-7, #12-2
Service Rating	A	D(J) / A(All others)	A	D(A, J, E) / A(Bal.)	E(G, P, S) / D(Bal.)

Contact Arrangement

Front face of pin insert or rear face of socket insert illustrated.

CONTACT LEGEND	16	12	8	4	0

9 CONTACTS



Insert Arrangement	32-3
Contact Size - No. of Contacts	#16-4. #12-2, #4-2, #0-1
Service Rating	D

10 CONTACTS







18-1	24-21	28-19
#16-10	#16-9, #8-1	#16-6, #12-4
A(B, C, F, G) / Inst.(All others)	D	B(H, M) / D(A, B) / A(All others.)

11 CONTACTS





Insert Arrangement	20-33	24-20
Contact Size - No. of Contacts	#16-11	#16-9, #12-2
Service Rating	A	D

12 CONTACTS







28-8	28-9	28-18
#16-10, #12-2	#16-6, #12-6	#16-12
E(L, M) / D(B) / A(All others)	D	C(M) / A(A, B) Inst.(C, D, E, F) / D(All others)

13 CONTACTS



Insert Arrangement	20-11
Contact Size - No. of Contacts	#16-13
Service Rating	Inst.

14 CONTACTS









20-27	22-19	28-2	28-20
#16-14	#16-14	#16-12, #12-2	#16-4, #12-10
A	A	D	A





Insert Arrangement	32-4	32-9
Contact Size - No. of Contacts	#16-12, #12-2	#16-12, #4-2
Service Rating	A(F, J, K, N) / D(Bal.)	D

Contact Arrangement

Front face of pin insert or rear face of socket insert illustrated.

CONTACT LEGEND	16	12	8	4	0

15 CONTACTS





Insert Arrangement	28-17	32-12
Contact Size - No. of Contacts	#16-15	#16-10, #12-5
Service Rating	B(R) / D(M, N, P) / A(All others)	A(C, D, E, F, G) / D(Bal.)

16 CONTACTS







Insert Arrangement	24-5	24-7	36-14
Contact Size - No. of Contacts	#16-16	#16-14, #12-2	#16-6, #12-5, #8-5
Service Rating	A	A	D

17 CONTACTS



19 CONTACTS



Insert Arrangement	20-29	36-13	22-14
Contact Size - No. of Contacts	#16-17	#16-15, #12-2	#16-19
Service Rating	A	E(N, P, Q) / A(All others.)	A

20 CONTACTS



22 CONTACTS





Insert Arrangement	28-16	28-11	36-1
Contact Size - No. of Contacts	#16-20	#16-18, #12-4	#16-18, #12-4
Service Rating	A	A	D

Contact Arrangement

Front face of pin insert or rear face of socket insert illustrated.

CONTACT LEGEND	16	12	8	4	0

23 CONTACTS





24 CONTACTS



Insert Arrangement	32-6	32-13	24-28
Contact Size - No. of Contacts	#16-16, #12-2, #8-3, #4-2	#16-18, #12-5	#16-24
Service Rating	A	D	Inst.

26 CONTACTS



30 CONTACTS



31 CONTACTS



Insert Arrangement	28-12	32-8	36-9
Contact Size - No. of Contacts	#16-26	#16-24, #12-6	#16-14, #12-14, #8-2, #4-1
Service Rating	A	A	A

35 CONTACTS







37 CONTACTS



Insert Arrangement	28-15	32-7	36-15	28-21
Contact Size - No. of Contacts	#16-35	#16-28, #12-7	#16-35	#16-37
Service Rating	A	Inst.(A, B, h, j) / A(All others)	D(M) / A(All others)	A

47 CONTACTS





48 CONTACTS



52 CONTACTS



Insert Arrangement	36-7	36-8	36-10	36-52
Contact Size - No. of Contacts	#16-40. #12-7	#16-46, #12-1	#16-48	#16-52
Service Rating	A	A	A	A