


VG 01A In-Line Receptacle

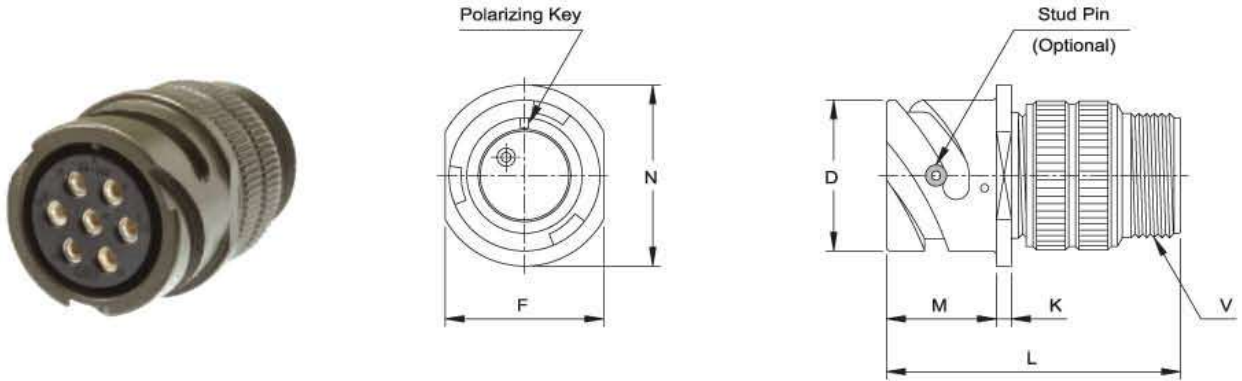

Part No.	D dia. +0.00 -0.15	F Ref.	K min./max.	L Ref.	M +0.79 -0.00	N dia. max.	V Thread Class 2A
INB01A 10SL-*	18.20	16.66	1.58 / 3.96	38.88	14.28	24.61	5/8-24 UNEF
INB01A 14S-*	24.60	22.61	1.58 / 3.96	42.87	14.28	29.36	3/4-20 UNEF
INB01A 16S-*	27.40	25.78	1.58 / 3.96	42.87	14.28	31.75	7/8-20 UNEF
INB01A 16-*	27.40	25.78	1.58 / 3.96	52.37	19.05	31.75	7/8-20 UNEF
INB01A 18-*	30.80	28.96	2.39 / 5.15	52.37	19.05	34.13	1-20 UNEF
INB01A 20-*	34.20	32.13	2.39 / 5.15	55.57	19.05	37.31	1 3/16-18 UNEF
INB01A 22-*	37.40	35.31	2.39 / 5.15	55.57	19.05	40.48	1 3/16-18 UNEF
INB01A 24-*	40.90	38.48	2.39 / 5.15	58.72	20.63	43.66	1 7/16-18 UNEF
INB01A 28-*	46.70	44.83	2.39 / 5.15	58.72	20.63	50.01	1 7/16-18 UNEF
INB01A 32-*	53.40	51.18	3.18 / 9.11	61.92	22.23	56.36	1 3/4-18 UNS
INB01A 36-*	59.60	57.66	3.18 / 9.11	61.92	22.23	62.71	2-18 UNS